



Cistern Liners

Potable Water

Protect your water supply with our easy-to-install liners. Certified to NSF/AMSO 61G and 372 standards, these liners provide in clean, safe drinking water storage. Our liners have the maximum puncture and rear resistance available, making them the most dependable and durable on the market.

Storage You Can Trust

Backed by 35 years of experience, and a reliability guarantee, you can't go wrong. Made for industrial, commercial, and residential water storage. Some customers even utilize them for secondary containment sumps in case of spills. Talk to us today about your unique application.



Cistern Liners

A quality liner can extend the life of your cistern tank, and help you avoid the high cost of replacing the cistern. The liner covers all those problems and provides a clean, safe container to store your water for many years to come.



Cistern Liners/Drop in Tanks

Our liners are the best available, potable grade, and comes with a 100% guarantee. Custom built to specifically fit your cistern, you will get a perfect fit that's easy to install. Provide consistent performance for the life of the liner. Order your customized cistern liner or drop-in tank today!

Features

- Potable (drinking) water safe (NSF and ANSI certified),
- Maximum puncture and tear resistance
- Many fabric options to choose from
- NSF/AMSD 61G Certified

Cistern Liners

Every Liner is Built to Fit

Your cistern liner will be built to the dimensions and specifications of your cistern tank. Please take note of the location of any pipes, tight openings, or fittings in the cistern tank, and mark them on your drawing.


A note about Geotextile Lining between Cistern Tank and Cistern Liner:

If your cistern tank is especially rough, you might consider placing a layer of geotextile fabric in between the liner and the tank. This is a simple and affordable way to extend the life of your tank liner. We can help - just call us 1-863-261-8388.



Benefits

- Easy install
- Made to fit
- Extends the life of your cistern (more cost effective than replacing a cistern)

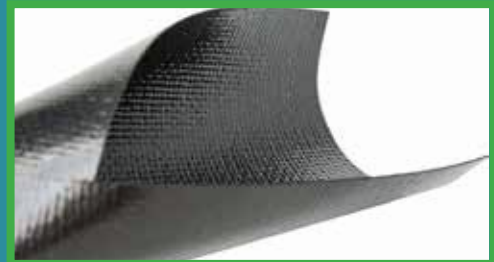

Cistern Liners Specs

	Single Scrim RPE (20 mil)	Single Scrim RPE (24 mil)	Double Scrim RPE (24 mil)	Single Scrim RPE (30 mil)
Weight	9.4 OZ/SQ YD (+/- 5%)	11.5 OZ/SQ YD (+/- 5%)	12 OZ/SQ YD (+/- 5%)	15.6 OZ/SQ YD (+/- 5%)
Description	BLACK 12X12 COUNT PER INCH	BLACK 12X12 COUNT PER INCH	BLACK 12X12 COUNT X 2	BLACK 12X12 COUNT PER INCH
Coating Thickness	2.75 MIL EACH (+/- 5%)	3.5 MIL EACH (+/- 5%)	2 MIL EACH (+/- 5%)	5.5 MIL EACH (+/- 5%)
Tensile Strength (Grab Method)	MD 250 Lbs TD 340 Lbs (ASTM D5034)	MD 350 Lbs TD 335 Lbs (ASTM D5034)	MD 380 Lbs TD 370 Lbs (ASTM D5034)	MD 340 Lbs TD 520 Lbs (ASTM D7004)
Tensile Strength (Strip Method)	MD 175 Lbs TD 270 Lbs (ASTM D7003)	MD 245 Lbs TD 250 Lbs (ASTM D7003)		MD 210 Lbs TD 320 Lbs (ASTM D7003)
Tear Strength (Tongue Method)	MD 75 Lbs/Inch TD 75 Lbs/Inch (ASTM D5884)	MD 110 Lbs/Inch TD 110 Lbs/Inch (ASTM D5884)	MD 75 Lbs TD 70 Lbs (ASTM D7003)	MD 45 Lbs/Inch TD 55 Lbs/Inch (ASTM D5884)
Bursting Strength (Mullen)	550 PSI (ASTM D751)	525 PSI (ASTM D751)	750 PSI (ASTM D751)	700 PSI (ASTM D751)
Hydrostatic Resistance	139 PSI (ASTM D751)	425 PSI (ASTM D751)	226 PSI (ASTM D751)	610 PSI (ASTM D751)
Puncture Resistance	140 Lbs (ASTM D4833)	182 Lbs (ASTM D4833)	220 Lbs (ASTM D4833)	200 Lbs (ASTM D4833)
Seam Strength (Shear) min	Seam shear should be >80% of the Strip tensile of the base fabric		Seam should be >80% of the strip tensile of the base fabric	
Seam Strength (Peel) min	4 Lbs/Inch (ASTM D413)		4 Lbs/Inch (ASTM D413)	
Low temp cold crack	-85° F (ASTM D2136)	-85° F (ASTM D2136)	-85° F (ASTM D2136)	-85° F (ASTM D2136)
MVTR	0.40 g/m ² -day (ASTM E96)	0.25 g/m ² – 24hr (0.036 perms)		0.32 g/m ² – 24hr (0.05 perms)
Carbon Black Content	3.6% (ASTM D4218)	3% (ASTM D4218)		3% (ASTM D4218)
UV Resistance	>90% strength retained after 2000 Hrs. (ASTM G-151)	>90% strength after 2000 Hrs. (ASTM G-151)	>90% strength after 2000 Hrs. (ASTM G-151)	>90% strength after 2000 Hrs. (ASTM G-151)
CBR Static Puncture		1157 lb (5127 N) (ASTM D6241)		1481 lb (5658 N) ASTM D6241
Permeability		1.40 x 10 ⁻¹² CM/SEC	1.77 x 10 ⁻¹² CM/SEC	1.87 x 10 ⁻¹² CM/SEC
Dimensional Stability				MD -4.4% TD -1.8% (ASTM D1204)
HP- OIT		1071 minutes		2410 Minutes (ASTM D5885)



Cistern Liners Specs

	Single Scrim Laminated LDPE with LLDPE Film (30 mil)	Double Scrim RPE (40 mil)	Double Scrim HDPE w/ LDPE Coating (45 mil)	Reinforced Polypropylene Liner Single Scrim Low Temperature (45 mil)
Weight	14.7 OZ./SQ.YD. (+/-5%)	18.5 OZ./SQ.YD. (+/-5%)	22.5 OZ./SQ.YD. (+/-5%)	11.04 OZ./SQ.YD. (+/-5%)
Description	BLACK 12 X 12 COUNT PER INCH	BLACK 16 X 16 COUNT PER INCH	BLACK 16 X 16 COUNT PER INCH	BLACK 9 X 9 POLYESTER SCRIM
Coating Thickness	2.4 MIL EACH (+/-5%)	2.5 MIL EACH (+/-5%)	5.0 MIL EACH (+/-5%)	13.0 MILS EACH (+/-10%)
Tensile Strength (Grab Method)	MD 410 Lbs TD 400 LBS. (ASTM D7004)	MD 680 Lbs. TD 680 Lbs. (ASTM D5034)	MD 655 Lbs. TD 880 Lbs. (ASTM D7004)	250 LBS/FT (ASTM D 7004)
Tensile Strength (Strip Method)	MD 260 Lbs. TD 260 Lbs. (ASTM D7003)	MD 460 Lbs. TD 460 Lbs. (ASTM D5035)	MD 435 Lbs. TD 565 Lbs. (ASTM D7003)	
Tear Strength (Tongue Method)	MD 79 Lbs. TD 81 Lbs. (ASTM D5884)	MD 140 Lbs. TD 135 Lbs. (ASTM D5884)	MD 105 Lbs. TD 110 Lbs. (ASTM D5884)	WARP 100 Lbs./FT (ASTM D 5884)
Bursting Strength (Mullen)	622 PSI (ASTM D3786)	1300 PSI (ASTM D3786)	1300 PSI (ASTM D751)	
Hydrostatic Resistance	635 PSI (ASTM D751)	685 PSI (ASTM D751)	880PSI (ASTM D751)	450 PSI (ASTM D 751)
Puncture Resistance	195 LBS (ASTM D4833)	350 LBS (ASTM D4833)	365 LBS (ASTM D4833)	120 LBS/FT (ASTM D 4833)
Seam Strength (Shear) min			>80% of the strip tensile value in the direction perp. to the seam. (ASTM D7747)	
Seam Strength (Peel) min			27 LBS INCH (ASTM D413)	
Low temp cold crack	-85° F (ASTM D2136)	-85° F (ASTM D2136)	-85° F (ASTM D2136)	-50° F (ASTM D 2136)
MVTR	0.33 g/m ² - 24hr (0.05 perms) (ASTM E96)	0.31 g/m ² – 24hr (0.04 perms)		
Carbon Black Content	3% (ASTM D4218)	3.1% (ASTM D4218)		
UV Resistance	>90% STRENGTH RETAINED ASTM G-151 AFTER 2000 HRS.	>90% STRENGTH RETAINED AFTER 2000 HRS.	>90% STRENGTH RETAINED AFTER 2000 HRS (ASTM G-154)	>8,000 HRS (ASTM G 155)
CBR Static Puncture	1272 lb (5658 N) (ASTM D6241)	2356 lb (10,461 N)		
Permeability		<2.65 x 10 ⁻¹² CM/SEC (ASTM D4491)	2.32 x 10 ⁻¹² CM/SEC	
Dimensional Stability	MD -2.9% TD -1.0%	MD -3.8% TD -1.8%		
HP- OIT	3048 minutes (ASTM D5885)	3048 min. (ASTM D5885)		


© 2023 One Clarion. All rights reserved. One Clarion terms and conditions apply.

All photos are representative only. Actual products may differ. Materials and specifications are subject to change without notice. Featured products in photos may include additional



Cistern Liner Fabrics - Consistencies


- Single Scrim RPE (20 mil)
- Single Scrim RPE (24 mil)
- Single Scrim RPE (30 mil)




- Double Scrim RPE (24 mil)
- Double Scrim RPE (40 mil)
- Double Scrim HDPE w/ LDPE Coating (45 mil)



- Single Scrim Laminated LDPE with LLDPE Film (30 mil)

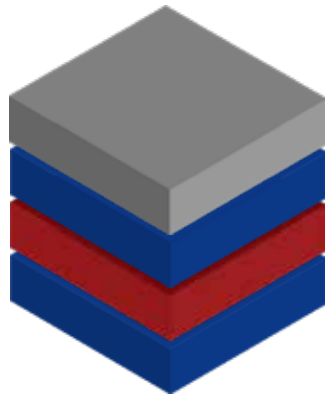

- Reinforced Polypropylene Liner, Single Scrim, Low Temperature, (45 mil)



■ LPDE Engineered Coating
■ HDPE Woven Reinforcement

■ 20 Year Engineered Coating
■ Engineered Coating

■ Woven Polyester Reinforcement

To find out more about our Cistern Liners, talk with one of our knowledgeable team.

For more complete information on One Clarion products and solutions, visit us on the web at: www.clarionmunicipal.com or call us at : (+1) 863-261-8388 | info@oneclarion.com

© 2023 One Clarion. All rights reserved. One Clarion terms and conditions apply.

