



## Express Potable Water Trailer


### Potable Water, Wherever You Need It

Safe and dependable drinking water, wherever you need it. With the Express Potable Water Trailer's NSF and ANSI certified components and algae resistant tank (rated specifically for potable water use), you can breathe easy knowing that the water you're providing for transport is safely protected. The DOT features, such as LED lights, safety chains, and surge (or electric) brakes facilitate safe transportation of the potable water on public roads. Use it to supply drinking safe water to construction sites, mobile offices, special events, for filling cisterns, and more!

For cost efficiency, choose the gravity-fed model that dispenses water without motorized equipment. For faster filling and water disbursement, we also offer this trailer with a Honda engine and pump that provides reliable performance you can count on. When a smaller job requires less potable water availability, consider the 500 gallon Express Potable Water Trailer as a practical solution.



# Features and Benefits

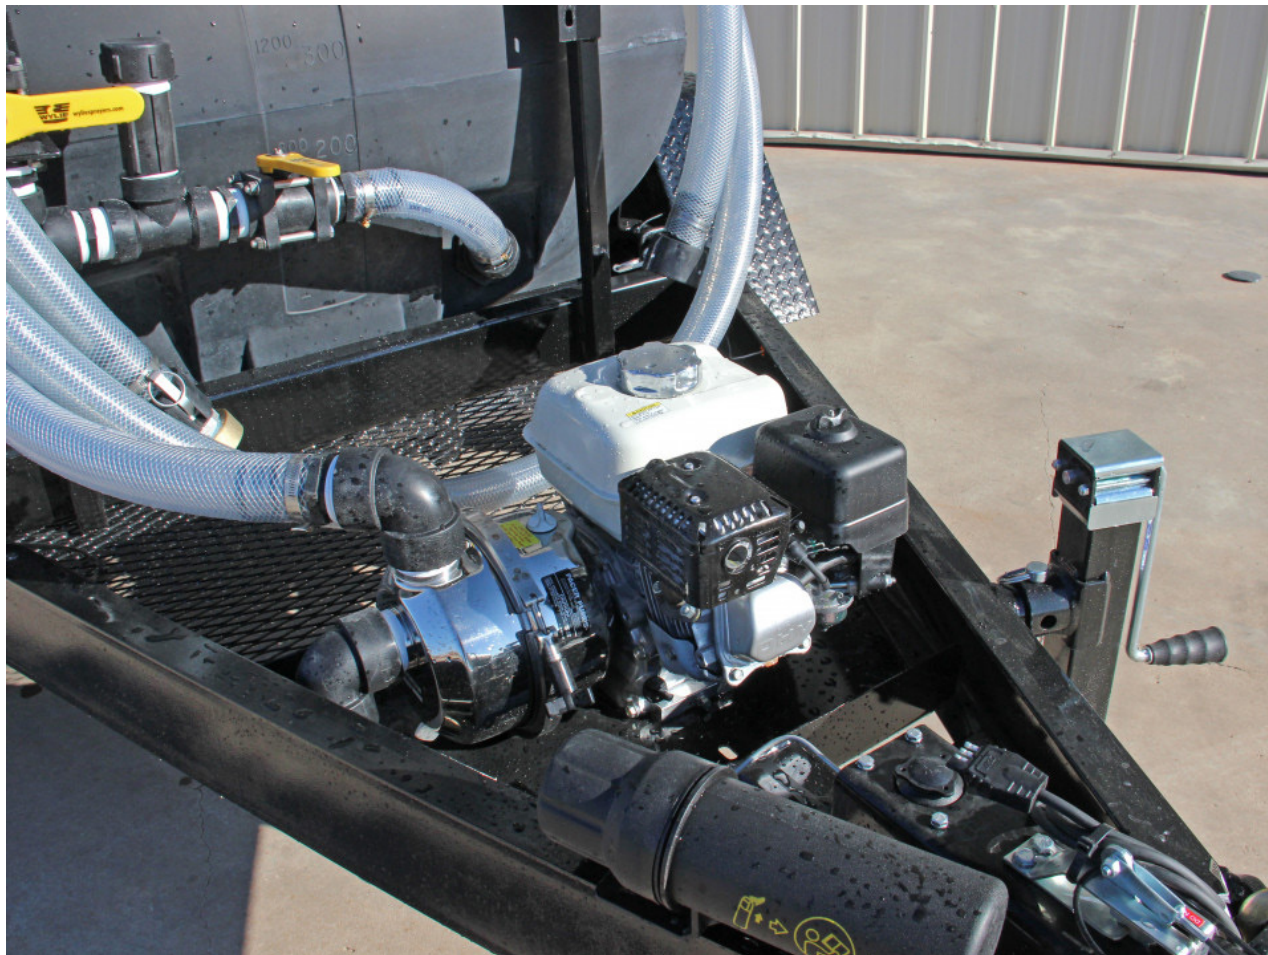

## Features

- Honda engine and 2" Pump
- 25' suction hose
- 25' fire hose with nozzle
- Surge brakes
- Tandem spring axels

## Benefits

- Components are rated for potable water use
- DOT compliant for public roadways
- Delivered turn-key & ready to use
- Choose gravity-fed or engine/pump

*We are here to serve you. Just call or email with your project specifications and details, and we'll do the rest. Our goal is to provide the best solution for your project, with materials delivered on time at a price that fits nicely within your budget.*



# Specifications

## Specifications

Tank	1025 gallon algae-resistant poly tank (FDA approved & NSF/ANSI certified for potable water use)
Engine & Pump (optional)	Honda engine & 2" stainless steel pump (NSF/ANSI 61 & 372 certified)
Maximum Flow Rate	180 gallons per minute
Fill	2" anti-siphon fill with 20' of 2" hose
Hose Spigots	1 gravity fed and 1 pressure outlet
Trailer	DOT compliant with LED lights, safety chain and surge brakes
Hitch	2" ball hitch or 3" pintle
Axles/Brakes	Tandem spring axles, surge brakes
Tires	ST225/90D16
GVWR	15,000 lb
Dimensions	196" (L) x 82" (W) x 80" (H)
Options:	Hose Reel with 1"x50' Hose Rear spray bar with 2 spray nozzles

\*Note: The Potable Water Trailer is also available in a gravity-fed model (without pump and engine). The Potable Water Trailer is available with a 1025 gallon tank also.

For more complete information on One Clarion products and solutions, visit us on the Web at [www.clarionmunicipal.com](http://www.clarionmunicipal.com).

Phone: (+1) 863-261-8388 | [info@oneclarion.com](mailto:info@oneclarion.com)

© 2024 One Clarion. All rights reserved. One Clarion terms and conditions apply.

All photos are representative only. Actual products may differ. Materials and specifications are subject to change without notice. Featured products in photos may include additional equipment or accessories.

